


# THE DURHAM COMPANY

## SOCKET BREAKER TRANSFER SWITCH W/METERING PROVISION 100 AND 200 AMPERE • RINGLESS ONLY • SINGLE PHASE

**SIDE VIEW\*\***



**SB204DT100B**

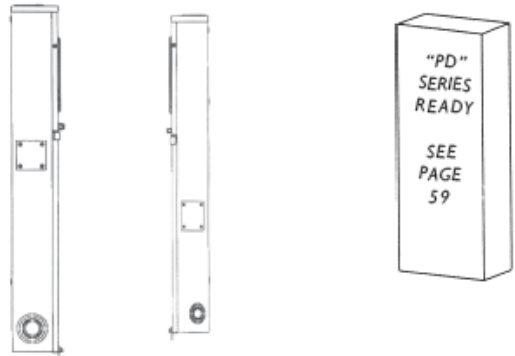

**SB204DT100B    SB114DT100B**



CATALOG NUMBER	MAIN	AUXILIARY
SB114DT50*	100 Amp Main	50 Amp Auxiliary
SB114DT100*	100 Amp Main	100 Amp Auxiliary
SB204DT50*	200 Amp Main	50 Amp Auxiliary
SB204DT100*	200 Amp Main	100 Amp Auxiliary

\*Select Hub needed from selection chart and add suffix to catalog number. Add "U" prefix for UL label.

HUB SELECTION CHART	
HUB OR TOP CONFIGURATION	CATALOG SUFFIX
SOLID TOP	A
(SM) HUB OPENING	B
COVER PLATE (SM)	C
1 1/4" (SM)	L
1 1/2" (SM)	M
2" (SM)	N
2 1/2" (SM)	P

Unit Information Socket Type: Terminal Self-Contained		
<b>100 Amp Main</b>	Wire Range	Line Side: #8-2/0 CU-AL
		Auxiliary: #14-1/0 CU
	Size	Load Side: (1) #6-250 kcmil CU-AL & (3) #14-1/0 CU-AL
		30 3/8" H x 12" W x 4 3/8" D
Weight	40 Pounds	
<b>200 Amp Main</b>	Wire Range	Line Side: #6-250 kcmil CU-AL
		Auxiliary: #14-1/0 CU
	Size	Load Side: (3) #6-250 kcmil CU-AL
		34 1/4" H x 13" W x 4 3/8" D
Weight	50 Pounds	

For male 50 amp locking-type receptacle installed & prewired to auxiliary connectors, add suffix "R" to catalog number. Example Catalog (USB114DTR50B).  
 For field installable 50 ampere twist lock receptacle order catalog number ARP00176.  
 Units with receptacles limited to 50A (12KVV) aux. input. Add 2 lbs. to weight for receptacle.  
 UNITS HAVE MULTI-RING KNOCK OUTS WITH A MAXIMUM OF 2 1/2" ON BOTTOM BACK SIDE.

\*\*Placement for receptacle shown. Unit is shipped with cover plate over the provision as shown.